

MB5U

High Performance isolated BiSS to PC Adapter (USB)

preliminary



Rev B1, Page 1/12

FEATURES

- ◆ USB 2.0 high speed PC interface
- ◆ FPGA based logic
- ◆ Hardware implemented interface protocols
- ◆ Fast realtime data communication (10 MHz BiSS; 4 MHz SSI)
- ◆ API for Windows: BiSS-Interface DLL
- ◆ Field capable design: box, field interfaces, USB bus powered
- ◆ Galvanic isolation
- ◆ USB powered 5V VDD supply for external applications
- ◆ Supported interfaces:
BiSS / SSI controlled by FPGA application

APPLICATIONS

- ◆ BiSS / SSI application development
- ◆ BiSS / SSI debugging
- ◆ Flexible interface configuration
- ◆ Encoder calibration
- ◆ Portable applications

SYSTEM VIEW



DESCRIPTION

The MB5U is a PC-USB 2.0 high speed interface BiSS master based on FPGA logic system design.

BiSS Interface Functions and Features:

- Up to 8 BiSS slaves
- RS422 10 MBit/s maximum data transfer rate
- SSI master
- BiSS C unidirectional and BiSS C master
- BiSS master MB100 BiSS IP based
- USB 2.0 interface up to 30 MBit/s data transfer
- USB 1.1 interface compatibility to 12 MBit/s data transfer
- Adapter USB bus powered
- Devices adapter powerable
- FPGA integrated 1st level RAM
- Available drivers for 32- and 64 bit versions of the following platforms:
 - Windows 10
 - Windows 8.1
 - Windows 8
 - Windows 7
 - Windows Vista
 - Windows XP
 - Windows Embedded 8 Standard
 - Windows Embedded Standard 7 (WES7)
 - Windows Embedded Enterprise Windows Embedded POSReady
 - Windows Embedded Server Windows XP embedded
 - Windows Server 2012 R2 Windows Server 2012
 - Windows Server 2008 R2 Windows Server 2008
 - Windows Server 2003
 - Windows Home Server.

The device offered here is a multifunctional device that contains integrated BiSS C interface components. The BiSS C process is protected by patent DE 10310622 B4 owned by iC-Haus GmbH. Users benefit from the open BiSS C protocol with a free license which is necessary when using the BiSS C protocol in conjunction with this iC.

Download the license at www.biss-interface.com/BUA

MB5U

High Performance isolated BiSS to PC Adapter (USB)


preliminary



Rev B1, Page 3/12

CONNECTORS

PIN CONFIGURATION BiSS

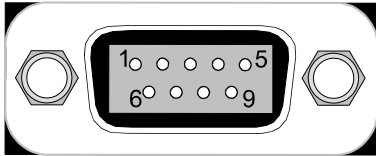


PIN FUNCTIONS

No. Name Function

1	n.c.	Not connected
2	MA+	Clock output P
3	MA-	Clock output N
4	VDD	Logic power supply
5	MO-	Master data output N
6	GND	Ground (0 V)
7	SL+	Device data input P
8	SL-	Device data input N
9	MO+	Master data output P

PIN CONFIGURATION Mini USB



PIN FUNCTIONS

No. Name Function

1	VCC	5 V USB supply
2	D-	Data -
3	D+	Data +
4	ID	Identifier: A = GND, B n.c.
5	GND	Ground (0 V)

PIN CONFIGURATION MU1C cable, sensor side J2 (optional, see Ordering Information)



PIN FUNCTIONS

No. Name Function

1	VDD	Logic power supply (5 V)
2	GND	Ground (0 V)
3	SLO+	Device data output P
4	SLO-	Device data output N
5	MA+	Master clock input P
6	MA-	Master clock input N

MB5U

High Performance isolated BiSS to PC Adapter (USB)

preliminary



Rev B1, Page 4/12

ABSOLUTE MAXIMUM RATINGS

Beyond these values damage may occur; device operation is not guaranteed.

Item No.	Symbol	Parameter	Conditions			Unit
				Min.	Max.	
G001	Power USB	Maximum Power Consumption from USB Bus	See USB specifications.		500	mA
G002	VDD	Logic Power Supply	Depends on USB host supply of adapter and cabling.	4.5	5.5	V
G003	I(VDD)	Logic Power Supply	VDD > 4.5 V; depends on USB host supply of adapter and cabling, no load on MA or MO.	150	200	mA
G004	I(VDD)	Logic Power Supply	VDD > 4.75 V; depends on USB host supply of adapter and cabling, load on MA or MO.	75	90	mA
G005	VG2G	Galvanic Isolation	VG = V(GND_USB) - V(GND_BiSS) Humidity 5% non condensating, 20°C, isolated surface. See TI ISO3086 datasheet		±500	V
G006	PIN4	VDD	No reverse supply permitted	-0.3	5,8	V
G007	PIN7, PIN8	RS422 input pins		-0.3	5,8	V

THERMAL DATA

Item No.	Symbol	Parameter	Conditions				Unit
				Min.	Typ.	Max.	
T01	Temp	Temperature Range		0		50	°C
T02	HUM	Humidity	non condensating	5		95	%

All voltages are referenced to ground unless otherwise stated.

All currents flowing into the device pins are positive; all currents flowing out of the device pins are negative.

MB5U

High Performance isolated BiSS to PC Adapter (USB)

preliminary



Rev B1, Page 5/12

ELECTRICAL CHARACTERISTICS

Item No.	Symbol	Parameter	Conditions	Min. Typ. Max.			Unit
				Min.	Typ.	Max.	
Power Supply Input							
001	Power USB	Maximum Power Consumption from USB Bus	See USB specifications			500	mA
Power Supply Output (VDD)							
101	VDD	Logic Power Supply		4.5	5.0	5.5	V
102	I(VDD)	Logic Power Supply	VDD \geq 4.5 V			250	mA
RS-422 Outputs MA/NMA/MO/NMO							
201	f(max)	Maximum Communication Frequency	50% duty cycle			10	MHz
202	PHY	RS4xx output Z and Y	See TI ISO3086 datasheet				
RS-422 Inputs SL/NSL							
301	f(max)	Maximum Communication Frequency	50% duty cycle			10	MHz
302	Ri	Input Resistance, terminator			120		Ω
303	PHY	RS4xx input A and B	See TI ISO3086 datasheet				

MB5U

High Performance isolated BiSS to PC Adapter (USB)

preliminary



Rev B1, Page 6/12

GALVANIC ISOLATION OF POWER SUPPLY, GND, BISS SIGNALS AND SHIELD

The MB5U provides VDD, GND, Shield and the BiSS signals MA+, MA-, MO+, MO-, SL+ and SL- with galvanic isolated. The MB5U field GND and shielding potential does not need to be identical with the adapter GND and adapter shield to prevent ground loops and potential differences.

N.B.:

MB5U is galvanically isolated. A common GND potential (field and host) and shield potential is not required.

BISS POWER SUPPLY CONTROL

The MB5U supplies the VDD voltage only with allocating and initializing the adapter. With closing the adapter resource or the software the voltage is turned off to permit a safe unplugging of connected devices. Non volatile content needs to be saved e.g. in an EEPROM before closing the interface adapter in any software environment.

N.B.:

MB5U may not be supplied into VDD. If the sensor needs to be supplied by 3rd power supply, the GND needs to be identical and any backwards supply into VDD of the adapter MB5U is not permitted.

BISS MASTER IP MB100

The MB5U is based on the MB100 BiSS master IP. With this implementation it is possible to connect one or more BiSS C devices or a single SSI device to the adapter. BiSS C protocol is fully supported. The adapter supports up to 8 BiSS C slave devices.

With BiSS there is 10 MBit/s RS422 maximum clocking available. The SSI protocol operation is also configurable.

With high speed buffered transfer the real-time measured data can be block-wise transferred to a Windows PC application for analysis, documentation, data processing, etc..

SENSOR SUPPLY THROUGH USB

The output voltage VDD and output current I(VDD) of the adapter do dramatically depend on the used PC, USB port and the used USB cable. On critical applications regarding sensor supply voltage and high sensors current consumption the shipped USB cable may cause a crucial voltage drop.

N.B.:

On critical applications it is recommended to reduce the USB cable length.

On critical applications it is recommended to choose a high quality and high current capable USB cable.

The shipped USB cable has a high quality and a high current capability.

MB5U

High Performance isolated BiSS to PC Adapter (USB)


preliminary



Rev B1, Page 7/12

MU1C ADAPTER AND CABLE SET

The iC-MU EVAL MU1C contains the extension cable to MU1C. This cable connects MU1C with the BiSS interface and does supply the MU1C board with VDD and GND.

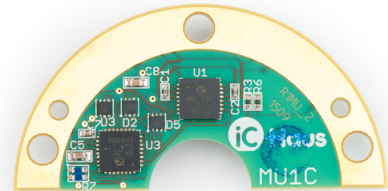

For more details please check:
<http://www.ichaus.com/MU1C>

Figure 1: MU1C

MB5U

High Performance isolated BiSS to PC Adapter (USB)

preliminary



Rev B1, Page 8/12

BISS SOFTWARE ENVIRONMENT

iC-Haus Evaluation Software

iC-Haus BiSS software for PCs running on Windows operating systems as well as the required USB and/or LPT(line printer port interface) driver are available as a ZIP file. iC-Haus software built with LabVIEW™ requires the installation of the LabVIEW™ Run-Time Engine (RTE). The RTE must be installed only once, hence there are two download links available:

	Download package without RTE (small size)	Download package including RTE (big size)
BiSS	http://www.ichaus.de/BiSS_gui	http://www.ichaus.de/BiSS_gui_rte
iC-NQC	http://www.ichaus.de/NQC_gui	http://www.ichaus.de/NQC_gui_rte
iC-MH	http://www.ichaus.de/MH_gui	http://www.ichaus.de/MH_gui_rte
iC-MH8	http://www.ichaus.de/MH8_gui	http://www.ichaus.de/MH8_gui_rte
iC-MH16	http://www.ichaus.de/MH16_gui	http://www.ichaus.de/MH16_gui_rte
iC-MHM	http://www.ichaus.de/MHM_gui	http://www.ichaus.de/MHM_gui_rte
iC-MU	http://www.ichaus.de/MU_gui	http://www.ichaus.de/MU_gui_rte
iC-MU150	http://www.ichaus.de/MU150_gui	http://www.ichaus.de/MU150_gui_rte
iC-MHL200	http://www.ichaus.de/MHL200_gui	http://www.ichaus.de/MHL200_gui_rte
iC-MN	http://www.ichaus.de/MN_gui	http://www.ichaus.de/MN_gui_rte
iC-MR	http://www.ichaus.de/MR_gui	http://www.ichaus.de/MR_gui_rte

N.B.:

The compatibility with the MB5U adapter depends on the individual software release and is subject to individual timeline. Please check <http://www.ichaus.de/software> for individual release status.

iC-Haus BiSS Interface DLL

For custom software running on Windows operating systems the BiSS Interface DLL enables rapid software development. Direct access to eval board adapter and high level protocol functions are directly available.

The BiSS DLL revision 6.0 and higher supports multiple MB5U adapter in one application.

Download BiSS Interface DLL: http://www.ichaus.de/biss1sl_interface

MB5U

High Performance isolated BiSS to PC Adapter (USB)

preliminary



Rev B1, Page 9/12

DESIGN REVIEW: Notes On Device and Cable

iC-MB5 iCSY MB5U .		
No.	Function, Parameter/Code	Description and Application Hints
1	Additional MA and MO Signal termination 120Ω inside adapter.	Additional VDD load inside the MB5U
2	USB cable 1.8m long dissipates power supply of adapter and BiSS/SSI device on high BiSS/SSI device load on VDD.	Use shorter cable on critical power situations
3	Noise on VDD and GND may disturb sensitive analog signal setup.	Separate VDD and supply external VDD

Table 4: Notes on device functions regarding iC-MB5 iCSY MB5U release .

iC-MB5 iCSY MB5U Z		
No.	Function, Parameter/Code	Description and Application Hints
1	Termination inside adapter 120Ω on MA and MO signals removed .	Less VDD load inside the MB5U
2	Different USB cable 1.8m long for higher power demand of adapter and high current load of BiSS/SSI device on VDD.	Higher power capability by cable
3	Noise reduction on VDD and GND.	Reduced
4	Shipments from iC-Haus GmbH	After 1. November 2017

Table 5: Notes on device functions regarding iC-MB5 iCSY MB5U release Z

EU DECLARATION OF CONFORMITYEU Konformitätserklärung
EU Declaration of Conformity

- | | | |
|----|--|--|
| 1. | Gerätetyp/Produkt
<i>Apparatus model/Product</i> | Adapter USB 2.0 <-> BiSS |
| 2. | Name und Anschrift des Herstellers
<i>Name and address of the manufacturer</i> | Gottinger Instruments GmbH
Ilzleite 34, 94034 Passau, Germany |
| 3. | Die alleinige Verantwortung für die Ausstellung dieser Konformitätserklärung trägt der Hersteller. <i>This declaration of conformity is issued under the sole responsibility of the manufacturer.</i> | |
| 4. | Gegenstand der Erklärung
<i>Object of the declaration</i> | MB5U |
| 5. | Der oben beschriebene Gegenstand der Erklärung erfüllt die einschlägigen Harmonisierungsrechtsvorschriften der Union. <i>The object of the declaration described above is in conformity with the relevant Union harmonisation legislation.</i> | |
| | <p>RICHTLINIE 2014/30/EU DES EUROPÄISCHEN PARLAMENTS UND DES RATES vom 26. Februar 2014 zur Harmonisierung der Rechtsvorschriften der Mitgliedstaaten über die elektromagnetische Verträglichkeit</p> <p><i>DIRECTIVE 2014/30/EU OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 26 February 2014 on the harmonisation of the laws of the Member States relating to electromagnetic compatibility</i></p> | |
| 6. | <p>Angabe der einschlägigen harmonisierten Normen, die zugrunde gelegt wurden, einschließlich des Datums der Norm, oder Angabe anderer technischer Spezifikationen, für die die Konformität erklärt wird, einschließlich des Datums der Spezifikation:
<i>References to the relevant harmonised standards used, including the date of the standard, or references to the other technical specifications, including the date of the specification, in relation to which conformity is declared:</i></p> <p><i>DIN EN 55022; VDE 0878-22:2011-12 - Einrichtungen der Informationstechnik - Funkstöreigenschaften - Grenzwerte und Messverfahren (CISPR 22:2008, modifiziert); Deutsche Fassung EN 55022:2010</i></p> <p><i>DIN EN 55024; VDE 0878-24:2016-05 - Einrichtungen der Informationstechnik - Störfestigkeitseigenschaften - Grenzwerte und Prüfverfahren (CISPR 24:2010 + Cor.:2011 + A1:2015); Deutsche Fassung EN 55024:2010 + A1:2015</i></p> | |
| 7. | Nicht zutreffend.
<i>No applicable.</i> | |
| 8. | Zusatzangaben
<i>Additional information</i> | -- |

Unterschiedet für und im Namen von:
Signed for and on behalf of:

Gottinger Instruments GmbH

Ort und Datum der Ausstellung:
place and date of issue

Passau, 25. April 2016

Name und Funktion
name, function

Reinhard Gottinger, Geschäftsführer
Reinhard Gottinger, Managing Director

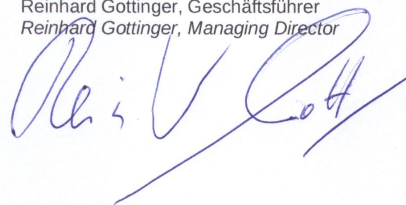


Figure 2: EU Declaration of Conformity

MB5U

High Performance isolated BiSS to PC Adapter (USB)

preliminary



Rev B1, Page 11/12

REVISION HISTORY

Rel.	Rel. Date*	Chapter	Modification	Page
A1	2015-04-22		Initial release.	

Rel.	Rel. Date*	Chapter	Modification	Page
A2	2015-06-02	ORDERING INFORMATION	The CABLE1 variant "iC-MB5 iCSY MB5U-CABLE1" is obsolete.	7

Rel.	Rel. Date*	Chapter	Modification	Page
B1	2018-01-16	ABSOLUTE MAXIMUM RATINGS	ABSOLUTE MAXIMUM RATINGS updated, partial transfer into ELECTRICAL CHARACTERISTICS.	4, 5
		ELECTRICAL CHARACTERISTICS	ABSOLUTE MAXIMUM RATINGS updated, partial transfer into ELECTRICAL CHARACTERISTICS.	4, 5
		MU1C ADAPTER AND CABLE SET	MU1C chapter updated.	5
		SENSOR SUPPLY THROUGH USB	Chapter SENSOR SUPPLY THROUGH USB added.	6
		MU1C ADAPTER AND CABLE SET	The iC-MU EVAL MU1C contains the extension cable to MU1C.	6
		DESIGN REVIEW: Notes On Device and Cable	Chapter added.	9
		EU DECLARATION OF CONFORMITY	Chapter added.	9
		ORDERING INFORMATION	Adding general information: the box includes cable USB (type A ↔ Mini B).	12

iC-Haus expressly reserves the right to change its products and/or specifications. An Infoletter gives details as to any amendments and additions made to the relevant current specifications on our internet website www.ichaus.com/infoletter and is automatically generated and shall be sent to registered users by email. Copying – even as an excerpt – is only permitted with iC-Haus' approval in writing and precise reference to source.

The data specified is intended solely for the purpose of product description and shall represent the usual quality of the product. In case the specifications contain obvious mistakes e.g. in writing or calculation, iC-Haus reserves the right to correct the specification and no liability arises insofar that the specification was from a third party view obviously not reliable. There shall be no claims based on defects as to quality in cases of insignificant deviations from the specifications or in case of only minor impairment of usability.

No representations or warranties, either expressed or implied, of merchantability, fitness for a particular purpose or of any other nature are made hereunder with respect to information/specification or the products to which information refers and no guarantee with respect to compliance to the intended use is given. In particular, this also applies to the stated possible applications or areas of applications of the product.

iC-Haus products are not designed for and must not be used in connection with any applications where the failure of such products would reasonably be expected to result in significant personal injury or death (*Safety-Critical Applications*) without iC-Haus' specific written consent. Safety-Critical Applications include, without limitation, life support devices and systems. iC-Haus products are not designed nor intended for use in military or aerospace applications or environments or in automotive applications unless specifically designated for such use by iC-Haus.

iC-Haus conveys no patent, copyright, mask work right or other trade mark right to this product. iC-Haus assumes no liability for any patent and/or other trade mark rights of a third party resulting from processing or handling of the product and/or any other use of the product.

Software and its documentation is provided by iC-Haus GmbH or contributors "AS IS" and is subject to the ZVEI General Conditions for the Supply of Products and Services with iC-Haus amendments and the ZVEI Software clause with iC-Haus amendments (www.ichaus.com/EULA).

* Release Date format: YYYY-MM-DD

MB5U

High Performance isolated BiSS to PC Adapter (USB)

preliminary



Rev B1, Page 12/12

ORDERING INFORMATION

Type	Package	Options	Order Designation
MB5U	55 mm x 22 mm x 85 mm Aluminium blue anodized	The box includes MB5U and cable USB (type A ↔ Mini B)	iC-MB5 iCSY MB5U

Please send your purchase orders to our order handling team:

Fax: +49 (0) 61 35 - 92 92 - 692

E-Mail: dispo@ichaus.com

For technical support, information about prices and terms of delivery please contact:

iC-Haus GmbH
Am Kuemmerling 18
D-55294 Bodenheim
GERMANY

Tel.: +49 (0) 61 35 - 92 92 - 0
Fax: +49 (0) 61 35 - 92 92 - 192
Web: <http://www.ichaus.com>
E-Mail: sales@ichaus.com

Appointed local distributors: http://www.ichaus.com/sales_partners