
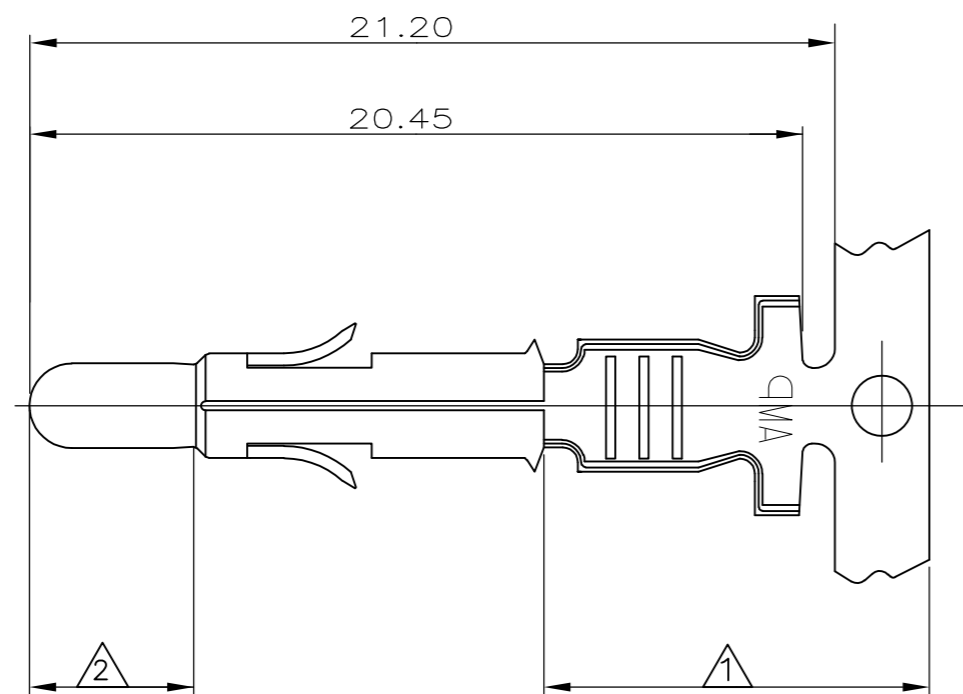
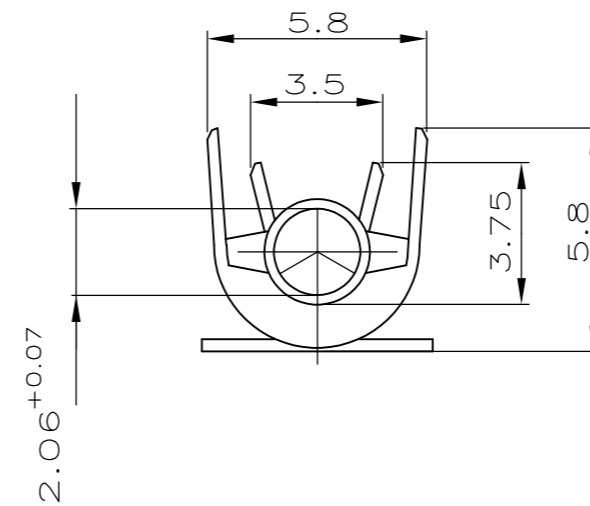


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AI	-	G		OBSOLETE 926868-5	15JAN2009	J.S	-
		G1		REVISED AS PER ECR-12-020451	21OCT2013	AV	RP

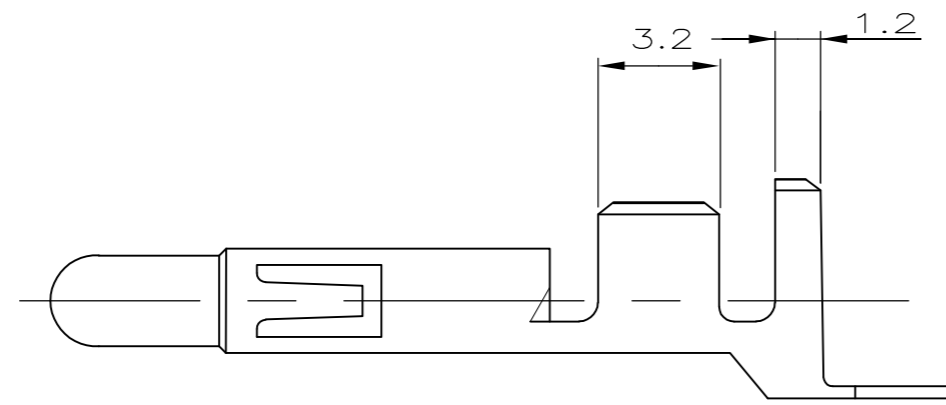

- 1 2-6 μm Sn über Ni in der Crimpzone
- 2 0.8 μm Gold über Nickel in der kontaktzone
- 3 Für isolations Ø3.3-5.1 mm geeignet

OBSOLETE

926900-7	926868-7	CuZn30 F53	1 2
926900-6	926868-6	CuSn4 F56	1 2
926900-5	926868-5	CuCrZr F50	vorverzinnt
926900-4	926868-4	CuCrZr F50	blank
926900-3	926868-3	CuSn4 F56	vorverzinnt
926900-1	926868-1	CuZn30 F53	vorverzinnt
LOOSE PIECE	Bestell-Nr	werkstoff	Oberfläche Farbe

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN		NAME	
mm		0 PLC	± -	ASHWINI	21OCT2013		
		1 PLC	± -	CHK	21OCT2013		
		2 PLC	± 0.20	ASHWINI			
		3 PLC	± -	APVD	21OCT2013		
		4 PLC	± -	RAJENDRA PAI			
MATERIAL		FINISH		PRODUCT SPEC		DRAWING NO	
-		-		-		A2 00779 C=926868	
CUSTOMER DRAWING				WEIGHT		RESTRICTED TO	
				-		-	
				SCALE		SHEET	
				1:1		1 of 1	
				REV		G1	