







4

3

4


2

三 角 法 (THIRD ANGLE PROJECTION)

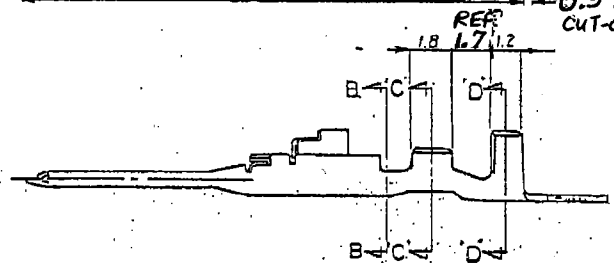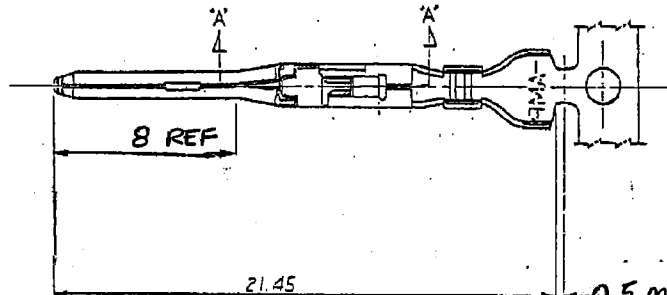

注: 1. 通用規格
製品規格 108-5302
取付通用規格 114-5142
取扱説明書 IS-503J

NOTES: 1. APPLICABLE SPEC.
PRODUCT SPEC. 108-5302
APPLICATION SPEC. 114-5142
2. INSTRUCTION SHEET IS-503J



断面 'B-B'
(SECT.)



断面 'A-A'
(SECT.)

	NYE製: 502H-20-UV (NYE: 502H-20-UV 117"カオ才化処理 (APPLIED LUBRICANT OIL))	錫めっき黄銅 (PRE-TINNED BRASS)	175149-3
175153-2		錫めっき黄銅 (PRE-TINNED BRASS)	175149-2
175153-1		錫めっき黄銅合金 (PRE-TINNED COPPER ALLOY)	175149-1
パラメータ端子型番 (L.P. P/N)	仕上 (FINISH)	材 料 (MATERIAL)	型番 (P/N)

		TE Connectivity	
線径 (WIRE RANGE)	絶縁径 (INSULATION DIA.)	品名 (NAME) (TAB CONTACT AMP. UNIVERSAL POWER CONN.)	
0.12-0.35mm (AWG #26-#22)	1.2-2mm	77-コネクタ, アンプユニバーサルパワーコネクタ	
材料 (MATERIAL) 表参照	仕様 (SPEC.) 表参照	公差 (TOL.)	サイズ (SIZE) 表参照
C2 REV ECR M-006821	DR. TM 8/14	1PC = ±0.2	B J C-175149
C1 REVISED PER ECO-11-005030	RK HMR 28MAR 11	2PC = ±0.3	REV. C2
LTR 2E (REVISION RECORD)	DR. CHK. DATE	尺 寸 (SCALE) 5-1	SHEET

単位: mm DIMENSIONS IN MM. DO NOT SCALE PRINT

PRINT DATE