


DRAWING MADE IN THIRD ANGLE PROJECTION

© COPYRIGHT 1974 BY AMP INCORPORATED, HARRISBURG, PA.
ALL INTERNATIONAL RIGHTS RESERVED. AMP INCORPORATED PRODUCTS
COVERED BY U. S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

206638-2 1. AS SHOWN
2. ON STRIP
206638-3 1. SAME AS-2 EXCEPT:
2. LOOSE PIECE

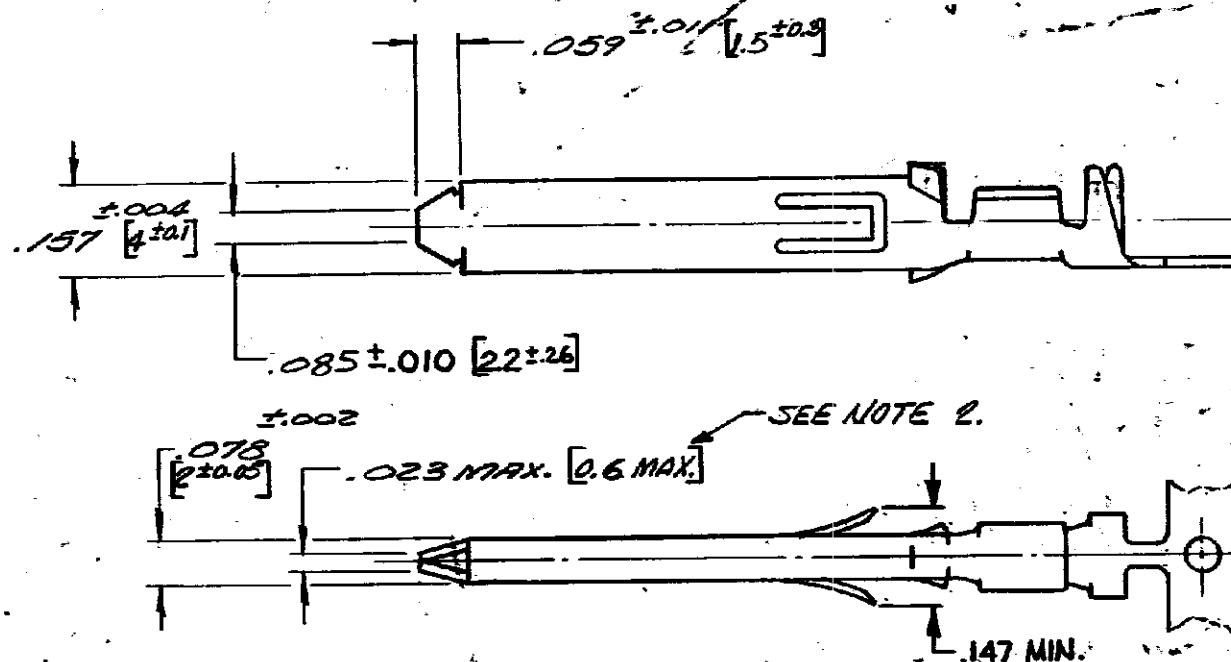

CONTACT U.L. LISTED FOR 15 AMPS. 250 VOLTS
WITH 16 AWG WHEN USED IN AMP INC.
HOUSING NO. 206637-1.

1. ACCOMMODATES 20-18-16 AWG, INSULATION
RANGE .080/.135 DIA.

2. FIGURES SHOWN IN BRACKETS REPRESENT
DIMENSIONS IN MILLIMETERS.

3. FINISH: TIN .00050 MIN. THICK PER MIL-T-10727 OVER NICKEL
(FLASH) PER QQ-N-290. PLATING THICKNESS POINT OF MEASUREMENT
EQUALS 1/2 CONTACT LENGTH.

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN INCHES.
TOLERANCES ON:
DECIMALS ±
ANGLES ±

MATERIAL
BRASS

FINISH
TIN

CONTRACT NO.

DR 206638-2

CHK DLM 4/30/74

APP DLM 4/30/74

DSN APP 4/30/74

OTHER APPD

PART NO



AMP INCORPORATED
Harrisburg, Pa.

NAME
PIN CONTACT - POWER
CORD RECP. (CRIMP)

SIZE CODE IDENT NO NUMBER
B 00779 206638

SCALE 2-1 SHEET 1 OF 1